
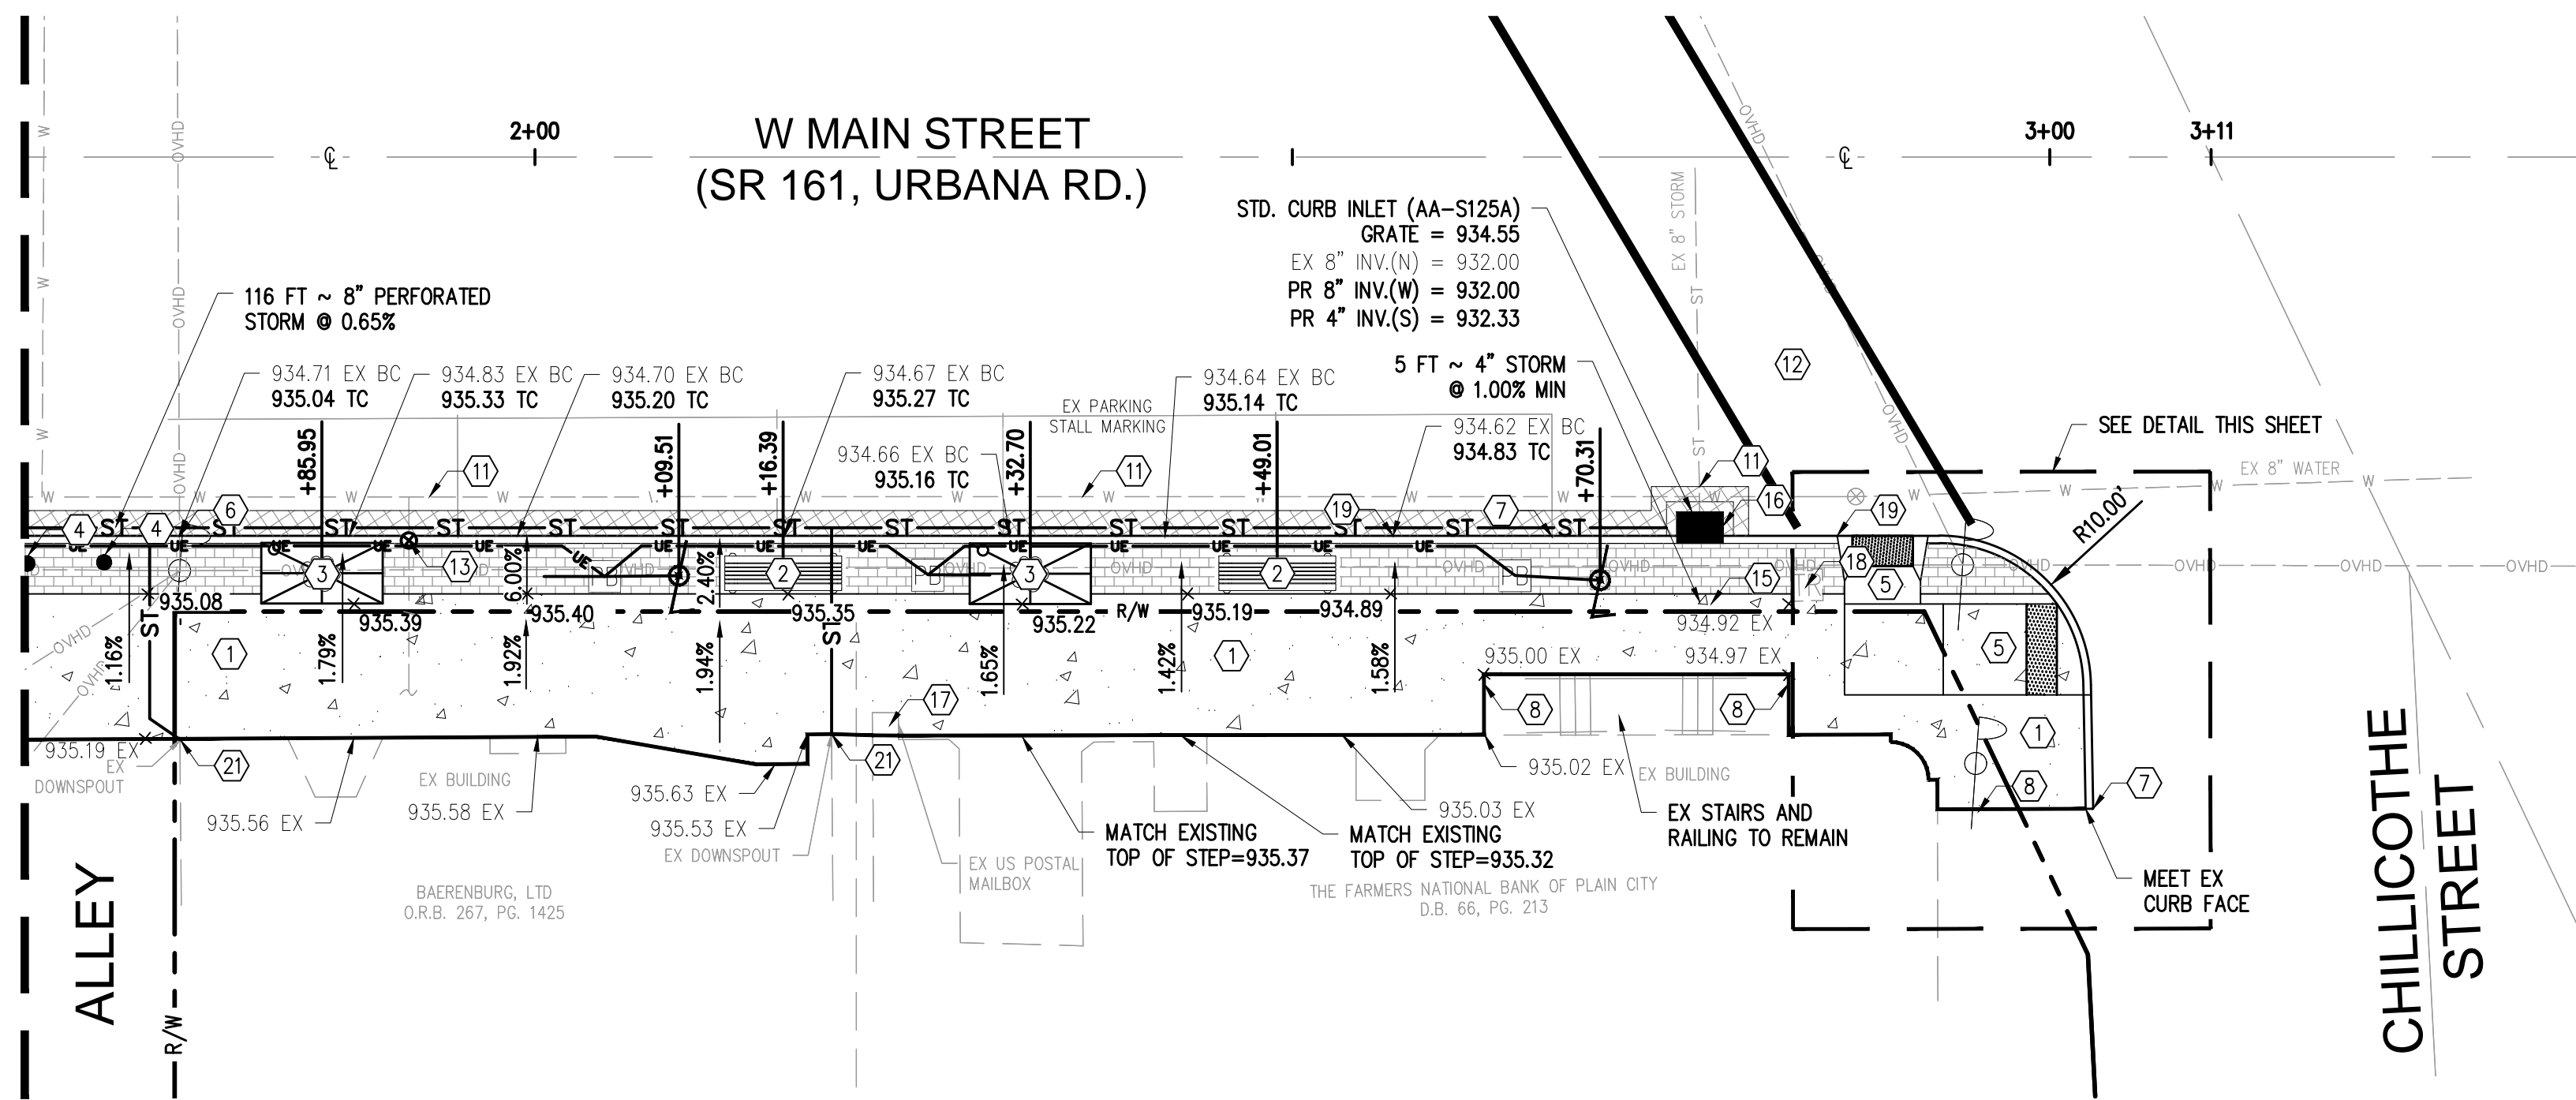
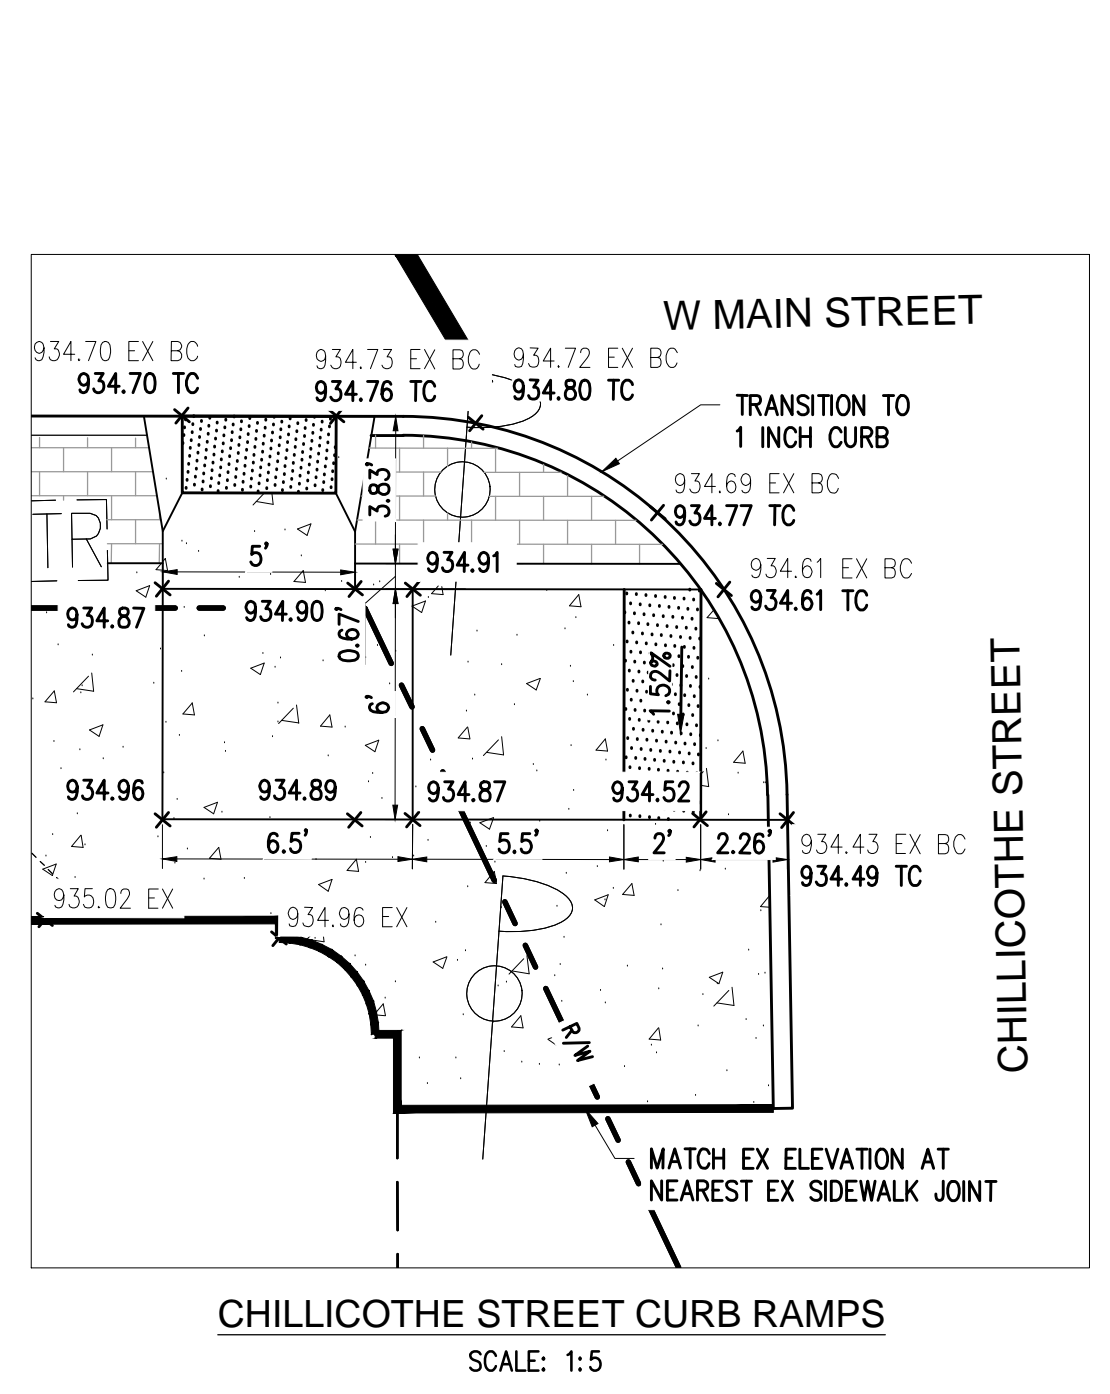


LEGEND

- P-LINE --- PROPERTY LINE
- R/W- -R/W- RIGHT OF WAY LINE
- W --- EX WATER LINE
- OHVD --- EX OH POWER
- ST --- EX STORM SEWER
- UE --- UE LIGHTING CONDUIT BANK SEE SHEET E100.
- ST --- ST STORM SEWER
- 935.00 SPOT ELEVATION TOP OF CURB ELEVATION
- 935.00 EX MATCH EX ELEVATION
- 935.00 EX BS MATCH EX BOTTOM OF STEP ELEVATION
- 935.00 EX BC MATCH EX BOTTOM OF CURB ELEVATION
- EX UTILITY POLE
- EX STREET SIGN
- EX ELEC BOX
- EX CROSSWALK PEDESTAL
- CURB STOP ADJUSTED TO GRADE
- WATER METER ADJUSTED TO GRADE
- LIGHTING CONDUIT PULL BOX. SEE SHEET E100.
- LIGHT POLE. SEE SHEET E100.
- STORM INLET
- 6" CONCRETE WALK
- HEAVY DUTY ASPHALT REPLACEMENT. SEE PAVEMENT SECTION SHEET C002.
- BRICK PAVERS
- DETECTABLE WARNING

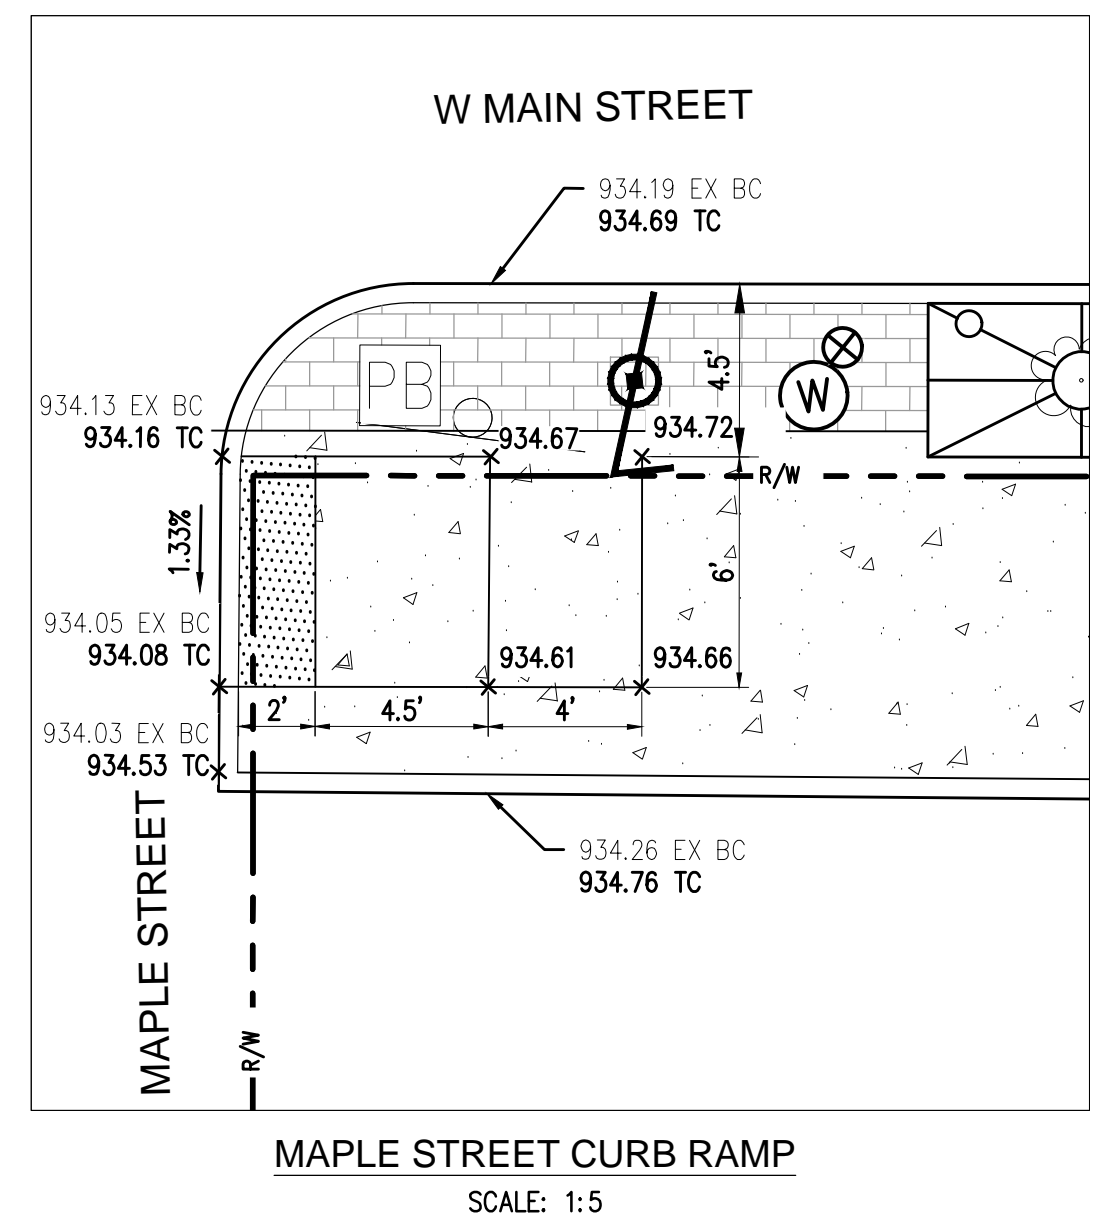


NOTES:

1. SEE E100 FOR ADDITIONAL PAVEMENT REPLACEMENT RESULTING FROM LIGHTING CONDUIT INSTALLATION.
2. PER CITY OF COLUMBUS CMS, CONTRACTOR SHALL INCLUDE THE COST OF PAVEMENT REMOVAL DURING UTILITY INSTALLATION WITHIN THE RELATED UTILITY ITEM NUMBER.
3. CONTRACTOR TO INCLUDE COSTS IN THEIR BID FOR ALL MAINTENANCE OF TRAFFIC ACTIVITIES REQUIRED TO PERFORM THIS WORK.

CODED NOTES

- 1 SIDEWALK ENHANCEMENTS. SEE TYPICAL SECTION SHEET C002.
- 2 BENCH AND CONCRETE SUPPORT PADS. SEE DETAIL SHEET C002. BENCHES TO BE PROVIDED BY VILLAGE.
- 3 4 FOOT X 8 FOOT TREE GRATE BY POLYGRATE. INCLUDE 5 INCH BY 5 INCH OPENING CUT INTO GRATE FOR POWER RECEPTACLE.
- 4 DECORATIVE BOLLARD. SEE DETAIL SHEET C002.
- 5 CURB RAMP. SEE DETAIL THIS SHEET.
- 6 LIMITS OF 4" CURB HEIGHT. TAPER CURB FROM 6" TO 4" HEIGHT OVER 10 FEET EACH SIDE.
- 7 EXTENTS OF CURB TO BE PAINTED YELLOW.
- 8 EXTENTS OF SIDEWALK ENHANCEMENTS. EX SIDEWALK REMOVAL TO BEGIN AT NEAREST JOINT.
- 9 EX SIGN TO BE REMOVED AND REPLACED.
- 10 EX SIGN TO BE REMOVED AND RESET.
- 11 CONTRACTOR TO REPLACE SECTIONS OF EX 8" WATER LINE DAMAGED OR AS REQUIRED BY PR STORM STRUCTURE OR PIPING INSTALLATION.
- 12 CROSSWALK STRIPING TO BE REMOVED AND REPAINTED BY VILLAGE.
- 13 ADJUST EX CURB STOP OR WATER METER TO GRADE.
- 14 ADJUST EX ELECTRICAL BOX TO GRADE.
- 15 30 LF OF KLASSIKDRAIN K100 TRENCH DRAIN.
- 16 REMOVE EX STORM INLET AND REPLACE AS SHOWN.
- 17 COORDINATE RELOCATION OF EX USPS MAILBOX DURING CONSTRUCTION WITH POST OFFICE.
- 18 EX CROSSWALK PEDESTAL TO BE MAINTAINED THROUGH CONSTRUCTION.
- 19 LIMITS OF 2.5" CURB HEIGHT. TAPER CURB FROM 6" TO 2.5" HEIGHT OVER 20 FEET WEST.
- 20 3" CURB HEIGHT AT THIS POINT. TAPER CURB FROM 6" TO 3" HEIGHT OVER 10 FEET EACH SIDE OF THIS POINT.
- 21 CONNECT EX DOWNSPOUT TO STORM AS SHOWN USING ODOT ITEM 603, 4" CONDUIT, TYPE E

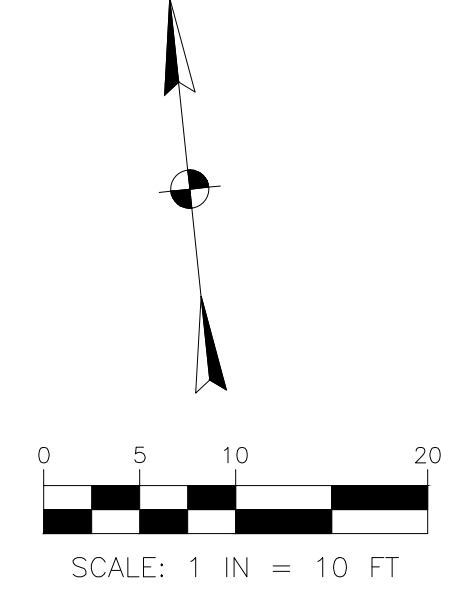

										DESCRIPTION	
NO.	DATE	BY									
1160 DUBLIN ROAD SUITE 100 COLUMBUS, OH 43215 TEL: 614.441.4222 FAX: 614.441.4222	PROJECT DATE: 06/02/2021	PROJECT NO: P2040021	DRAWN BY: RAHR	CHECKED BY: RLV							
											
											
PREPARED FOR: SIDEWALK ENHANCEMENT PLAN FOR MAIN STREET VILLAGE OF PLAIN CITY, OH											
SITE PLAN											
C100											